



Philips LED Inspection  
lamps  
LED Bonnet lamp

With telescopic holder



CBL50

## See better, work better

### Professional lighting tool

The Philips LED bonnet lamp offers a powerful 900 lumen light output to ensure total illumination of your working area. With its adjustable telescopic mounting, the LED bonnet lamp will enlight every engine or interior compartment.

#### More light output

- High-Power Luxeon LED
- 100° beam angle

#### More eye-comfort

- Soft natural light that is comfortable to the eyes

#### High resistance

- Robust aluminum housing
- Water & dust proof

#### Hands-free lighting

- Flexible mounting that stretches from 1,2 to 1,7 meters

#### Garage safety requirements

- 24V DC plug in power supply

A+

PHILIPS


# Highlights

## Light output: 900 lumens



With 900 lumens light output ensure you are not left in the dark when trying to spot even the smallest details.

## Wide beam angle: up to 100°

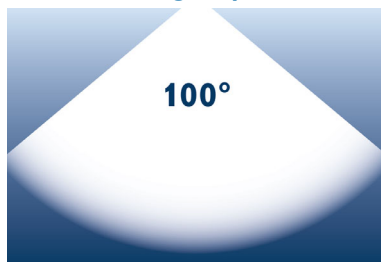

The wide beam angle of 100° will enable you to focus on specifics part and to deliver the right amount of light you need.

## White LED light: 6500 K



Soft natural light that is comfortable to the eyes during longer periods of time. Light with a colour temperature between 6000 and 7000 K. Brighter light might be extremely clear but is unnatural to the eye and will lead to fatigue.

## Strong impact resistance -IK07




The robust case is designed for a tough working environment and conforms to IK07

## Water & dust protected -IP54



The LED inspection lamp is water resistant, and conforms to IP54.

## Adjustable telescopic mounting



Flexible mounting that stretches from 1,2 to 1,7 meters with soft cover protecting the painting of the vehicle for easy and flexible positioning during work.

## 24V DC plug in power supply



The operating voltage of the product is 24V, making it safe to use it in garage environments with a 24V power plug.

# Specifications

## Maximum visibility

- Beam angle: 100°
- Color temperature: 6500 K
- Light output: 900 lumens
- Light intensity: 500 lux at 0.5 m
- Number of LED: 36
- LED lifetime: 10000 hours

## Robust

- Impact protection rating (IK): IK07
- Ingress protection rating (IP): IP54
- Resistant to: oil, grease, chemical & workshop solvents
- Operating temperature: -10°C to 40°C
- Cable operating temperature: -25°C to 50°C
- Materials & finishing: aluminum housing

## Hands-free

- Telescopic holder
- Included accessories: 2 clip-on magnets

## Power

- Operating line voltage: 100-240V
- Power consumption: 15 W
- Plug type: EU
- Charging cable type: 24V DC plug in power supply

## Product measurement

- Lamp dimension (mm): Ø27 x 1200 length
- Cable length: 5 m
- Holder dimension: 1200 to 1700 mm

## Product weight

- without cable: 500 g
- with cable: 1000 g
- without holder: 500 g
- with holder: 1000 g

## Outer Carton

- Number of consumer packagings: 6
- Outer carton (L x W x H): 120 x 32 x 25 cm
- Gross weight: 11.9 kg
- GTIN: 1 87 27900 39066 4

## Country of origin

- Denmark



Issue date 2014-03-30

Version: 1.0.2

12 NC: 9237 957 90101  
EAN: 87 27900 39066 7

© 2014 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

[www.philips.com](http://www.philips.com)